



▲ D303



▲ D403



▲ D503



▲ GH400(250W)





### 產品特點

- 特級加工：精密螺旋減速齒輪加頂級齒輪油，馬達前後蓋車削
- 保護裝置：馬達具溫度偵測保護，保險絲，或加電流過載偵測器
- 防蟻保護：強化電控盒殼體密封，防護小昆蟲、螞蟻入侵
- 剎車系統：無鏈止板彈簧剎車結構
- 控制系統：採用機械連鎖電磁接觸器，大接點，耐大電流
- 表面處理：高級烤漆塗裝
- 適用範圍：一般住家鐵捲門、工廠倉庫

## ◆ D303 捲門機特性表

型號	D303	D403	GH400	D503
荷重 kg(門軸)	300(4 吋)	400(4 吋)	400(4 吋)	500(4 吋)
功率 W	180	213	250	373
電源	1Ø	1Ø	1Ø	1Ø
頻率 Hz	60	60	60	60
電壓 V	110/220	110/220	110/220	110/220
滿載電流 A	4.65/1.8	6.06/2.39	5.86/2.1	6.55/3
馬達轉矩 kg-cm	11.1/12.3	16.4/16.7	15.4/16.8	21.9/22.1
電容 uFxVAC	30x250/14x300	35x250/16x300	30x250/14x300	46x250/25x300
極數	4P	4P	4P	4P
滿載轉速 rpm	1424	1242	1500	1649
輸出轉速 rpm	39-40	39-40	39-40	39-40
淨重/毛重 kg	11.18/11.91	11.21/11.94	11.83/12.56	12.82/13.61
傳動斜齒輪	M1.25x57Tx12L	M1.25x 57Tx14L		
減速比	43.36			
額定時間	10min			
手拉鏈條	2.5M			3.33M
主動輪	50×9T			
架板輪	50×50T			

◆ D303/D403/D503/GH400 尺寸圖/腳座尺寸(mm)

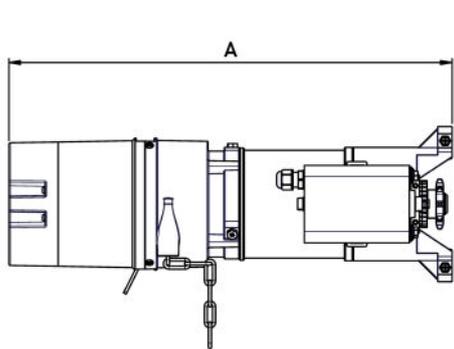

3L/3R

4L/4R/4T

		A	B	C	D	E
300KG	D303-3L/3R	464.3	134	166	63.4	134
	D303-4L/4R/4T	464.3	134	164	17.5	72
	D303-3HL/3HR/3HT	464.3	84	120	43.7	95
400KG	D403-3L/3R	464.3	134	166	63.4	134
	D403-4L/4R/4T	464.3	134	164	17.5	72
	D403-3HL/3HR/3HT	464.3	84	120	43.7	95
400KG	GH400-3L/3R	479.3	134	166	63.4	134
	GH400-4L/4R/4T	479.3	134	164	17.5	72
	GH400-3HL/3HR/3HT	479.3	84	120	43.7	95
500KG	D503-3L/3R	494.3	134	166	63.4	134
	D503-4L/4R/4T	494.3	134	164	17.5	72
	D503-3HL/3HR/3HT	494.3	84	120	43.7	95

## ◆捲門機系列-D3/D4 腳座選擇

	<p>三腳鏈條式:D3-3L 傳動鏈輪:50×9T</p>	<p>選配: 40×10T 50×10T 60×8T</p>
	<p>三腳插心式:D3-3R</p>	<p>50×9T(在架板不附)</p>
	<p>四腳鏈條式:D3-4L 傳動鏈輪:50×9T</p>	<p>選配: 40×10T 50×10T 60×8T</p>
	<p>四腳插心式:D3-4R</p>	<p>50×9T(在架板不附)</p>
	<p>四腳齒輪式:D3-4T 傳動齒輪:M5×9T</p>	<p>選配: M5×8T            M5×12T- M5×9T-         M6×8T M5×10T-        M6×9T-</p>
	<p>隱藏鏈條式:D3-3HL 傳動鏈輪:50×9T</p>	<p>選配: 40×10T 50×10T 60×8T</p>
	<p>隱藏插心式:D3-3HR</p>	<p>50×9T(在架板不附)</p>
	<p>隱藏齒輪式:D3-3HT 傳動齒輪:M5×10T-</p>	<p>選配: M5×8T M5×9T M5×9T-</p>